

SYCAMORE

Installation instructions : SY2432 Luna Round 4 Light Plinth Kit

Thank you for purchasing this SycamoreLED.com product. Please make sure instructions are followed carefully prior to and during installation and product is not altered, otherwise warranty may not be valid. For technical support or warranty information please visit www.sycamoreLED.com, or call our dedicated technical helpline +44 (0) 113 2866686.

IMPORTANT—Please read prior to installation

- 1) Please read these instructions carefully before commencing any work
- 2) This product must be installed by a qualified electrician in accordance with the current IEE wiring regulations
- 3) To prevent electrocution switch the power off at the mains supply before installing or maintaining this fitting
- 4) Ensure others cannot restore the electrical supply without your knowledge
- 5) The PSU must be rated 24VDC and be compatible with the pre-wired connector system of this product
- 6) Never exceed the wattage stated

GENERAL


Item	Rated voltage/V	Rated power/W	IP Rating	Protection
SY2432	24v DC	4x0.5W	20	CLASS Ⅱ

PRE—INSTALLATION

- 1) Prepare all the parts and tools required for the installation
- 2) Turn off power before installation.
- 3) If the housing or diffuser is broken or damaged do not use it.

INSTALLATION with Diagram

- 1) Cut the diameter hole 28MM in the surface to which the light is being installed.
- 2) Put the wire through the hole and connect the power with 24VDC driver
- 3) Ensure the body of the lamp is securely fixed on the face of installation, then restore the power and check operation.
- 4) Select desired colour temperature from by pressing the colour switch on the rear. (fig1) - Cool white, Natural white or Warm White.
- 5) Push the lamp into hole.
- 6) Front bezel is held on by magnets and can be easily removed and replaced with alternative colours

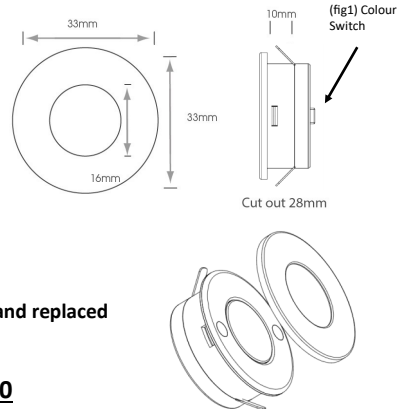

Please note that the LED driver is IP20

CARE IN USE

- 1) Please note this fitting has non replaceable parts
- 2) Light is not dimmable
- 3) Always switch off or disconnect from the mains when cleaning the product.
- 4) We recommend cleaning with a soft dry cloth. Do not use scourers, abrasives or chemical cleaners.