

Installation instructions : 10W IP65 Fire Rated Dimmable LED Downlight SY7631

Thank you for purchasing this SycamoreLED.com product. Please make sure instructions are followed carefully prior to and during installation and product is not altered, otherwise warranty may not be valid. For technical support or warranty information please visit www.sycamoreLED.com, or call our dedicated technical helpline +44 (0) 113 2866686.

IMPORTANT—Please read prior to installation

- 1) Please read these instructions carefully before commencing any work
- 2) Please retain these instructions for future reference
- 3) It is strongly recommended that this unit is installed by a qualified electrician in accordance with the IEE wiring regulations and building regulations
- 4) To prevent electrocution switch the power off at the mains supply before installing or maintaining this fitting
- 5) Ensure others cannot restore the electrical supply without your knowledge
- 6) The PSU must be rated 12VDC and be compatible with the pre-wired connector system of this product
- 7) Never exceed the wattage stated

Installation Instructions

- 1) Cut out: 65—70mm
- 2) Overall diameter: 88mm
- 3) Depth: 55mm
- 4) Bezel: 3mm

Installation Instructions

- 1) These products are designed for connection to a 200-240V mains supply
- 2) Any broken or damaged parts should be replaced as soon as possible
- 3) Always switch off mains supply before servicing
- 4) Ensure that a sample hole is cut in some scrap material to familiarise yourself with the installation. Once you are completely satisfied, locate the area suitable to install these luminaires. Cut a 65—70mm round hole in the ceiling and ensure sufficient ceiling void depth without infringing on joists water pipes or electrical cables. Connect cable to light & select suitable colour rendition using the switch on the driver
- 5) Fit spacer bracket provided to allow continuation of insulation
- 6) Ensure there is adequate free air ventilation around the fitting
- 7) Turn on the mains supply to test the luminaire

Bezel fitment/replacement Alternative colour bezels are available

- 1) The interchangeable bezels simply screw on or off from the front of the fitting.

Recommended Dimmer:

- 1) Non-Electronic Leading Edge: Shneider/GET/Danlers/BG/Varilight/Deta
- 2) Electronic Dimmers: Rako
- 3) Do not exceed ¼ of dimmer capacity. (e.g. for 400W dimmers, do not exceed 100W).


Lamp Replacement

- 1) Non Replaceable LED MODULE

sycamore  **SY7631**



This luminaire
contains built-in
LED lamps.

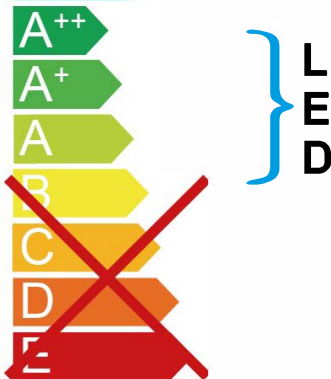

The lamps cannot be
changed in the luminaire.

874/2012

