


Installation instructions: 24V TriGlow Circa SY2431

Thank you for purchasing this SycamoreLED.com product. Please make sure instructions are followed carefully prior to and during installation and product is not altered, otherwise warranty may not be valid. For technical support or warranty information please visit www.sycamoreLED.com, or call our dedicated technical helpline +44 (0) 113 2866686.

IMPORTANT—Please read prior to installation

- 1) Please read these instructions carefully before commencing any work
- 2) Please retain these instructions for future reference
- It is strongly recommended that this unit is installed by a qualified electrician in accordance with the IEE wiring regulations and building regulations
- 4) To prevent electrocution switch the power off at the mains supply before installing or maintaining this fitting
- 5) Ensure others cannot restore the electrical supply without your knowledge
- 6) The PSU must be 24Vdc rated and compatible with the pre-wired connector system of this product
- 7) Locate driver (IP20) in an unclassified zone
- 8) Never exceed the wattage stated

DIAGRAMS

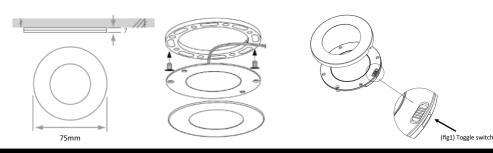

INSTALLATION

- Remove the trim ring from the light and lift the LED light out of the surface mounting ring (without completely removing wire).
- Position mounting ring into the desired location. Ensure the wire for the LED light is positioned in the wire groove of the surface mounting ring.
- Select desired colour temperature from the toggle switch under the front cover (fig1) Cool white, Natural white or Warm White.
- 4) Attach surface mounting ring to surface using the screws provided. Pull the excess wire through the wire notch, then reattach the LED light to the surface mounting ring.
- 5) Connect the trim ring to the LED light magnet tabs. Attach wire evenly to surface medium with mounting hardware.
- 6) Place driver in desired secured location.
- 7) Once assembly is complete, turn on power to confirm fixture is working properly.

CARE IN USE

- 1) Please note this fitting has non replaceable parts.
- This light is not dimmable.
- 3) Always switch off or disconnect from the mains when cleaning the product.
- 4) We recommend cleaning with a soft dry cloth. Do not use scourers, abrasives or chemical cleaners.
- 5) For your safety, this fixture must be wired in accordance to local electrical codes and ordinances. All work should be carried out by a qualified electrician.