



Infinity Compatible\*\*\*

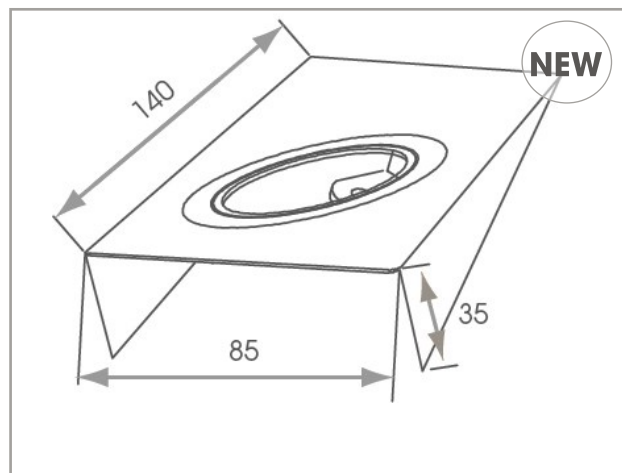

## FEATURES

The Sirius Connect features an innovative new plug and play system, in which the cable detaches directly from the back of the light unit enabling the fitting to be installed easily into the base of a cabinet. The Sirius Connect also features a diffused cover, so there are no visible LED points in the fitting, and also has a 120 degree beam angle which fills cabinets or work surfaces, eliminating dark spots.

## MAXIMUM LUX LEVELS

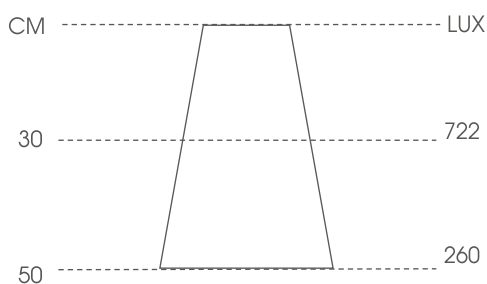

## THE TECHNICAL SPEC...

Fitting Type	LED
Voltage	12vdc
Colour Temperature	Warm White (3000—3500k) Natural White (4000—4500k)
Lamp Life*	30,000 hours
Wattage	2.6W
Number of LED's	6
Luminous efficacy	Warm White—65 Natural White—70
CRI	Warm White—82 Natural White—85
Cable Length	2m
Mounting	Surface
Beam Angle	120 Degree
IP Rating	IP44

\*Based on 70% of initial lumen output

Part Numbers	Description	
SY7882WW or NW	Sirius Connect Designer Recti light Stainless Steel—Warm or Natural White LED	SS
Suitable Power Converters		
SY9980B	12Vdc 8W LED Power Converter (1—3 lights)	
SY9739A/MF**	12Vdc 15W LED Power Converter (1—5 lights)	

\*\*Power converters with suffix A/MF are compatible with the Infinity connection system, please contact our office for further information