



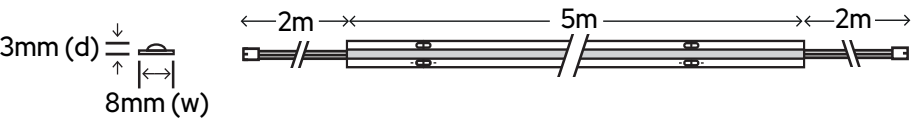


- SOB Technology (SMD On Board) - Provides a higher luminous efficacy than COB LED strips.
- Perfect for applications where maximum output with lower energy consumption is critical
- 2m cable on both ends
- Cut marks every 28mm, and any cut pieces can be re-used with the addition of our reconnection cable
- 5 Year Guarantee

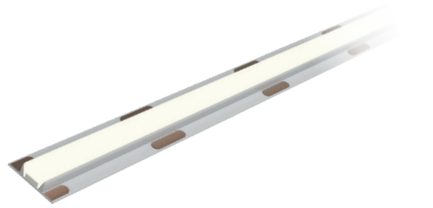

Part Code	Description	Voltage	Wattage Per Metre	Kelvins	LED's Per Metre	Lumens Per Watt	Cut Marks	Cable Length
SY2458WW-3	Silk 3m Reel Warm White	24Vdc	6W	2700K	288	110 lm	28mm	2m at both ends
SY2458NW-3	Silk 3m Reel Natural White	24Vdc	6W	4000K	288	110 lm	28mm	2m at both ends
SY2458WW-5	Silk 5m Reel Warm White	24Vdc	6W	2700K	288	110 lm	28mm	2m at both ends
SY2458NW-5	Silk 5m Reel Natural White	24Vdc	6W	4000K	288	110 lm	28mm	2m at both ends

Accessories

Part Code	Description
(a) SY2459/2M	2m Reconnection Distribution Cable
(b) SY2459C	Corner Connector (30mm flexi)
(c) SY2459S	Direct Connector



LED Drivers

Part Code	Description
SY2499-15	15W 24Vdc LED Driver (max 2.5m)
SY2499-30	30W 24Vdc LED Driver (max 5m)
SY2499-60	60W 24Vdc LED Driver (max 10m)

