

NEW!

bespoke contract
LIGHTING solutions
by
sycamoreLED.com

A new collection of LED Lighting & Controls which have been specifically designed to suit;

- MODULAR BUILDINGS
- HIGH-RISE LIVING SPACES
- NEW HOUSING DEVELOPMENTS
- STUDENT ACCOMMODATION
- REFURBISHMENT PROJECTS
- LEISURE INDUSTRY
- HOTELS

ALL PRODUCTS ARE COVERED BY A 5-YEAR WARRANTY



The range has been designed to offer a bespoke solution for lighting & lighting controls within kitchens, bedrooms, bathrooms, outdoor kitchens & home offices.

A project manager is assigned to all installations, and they are available to assist with advice, site visits, before, during and after the installation of our products.

Our technical & design team can offer assistance from concept to completion on all projects and are on hand to discuss subjects such as photometric data, lux levels and wiring configurations.

All the lighting is compatible with home automation systems such as Lutron & Rako.

Call our technical team for more information:
0113 286686 and press option 2
or email tech@sycamoreLED.com




Project: 250 City Road



Project: 250 City Road



Project: Battersea Reach

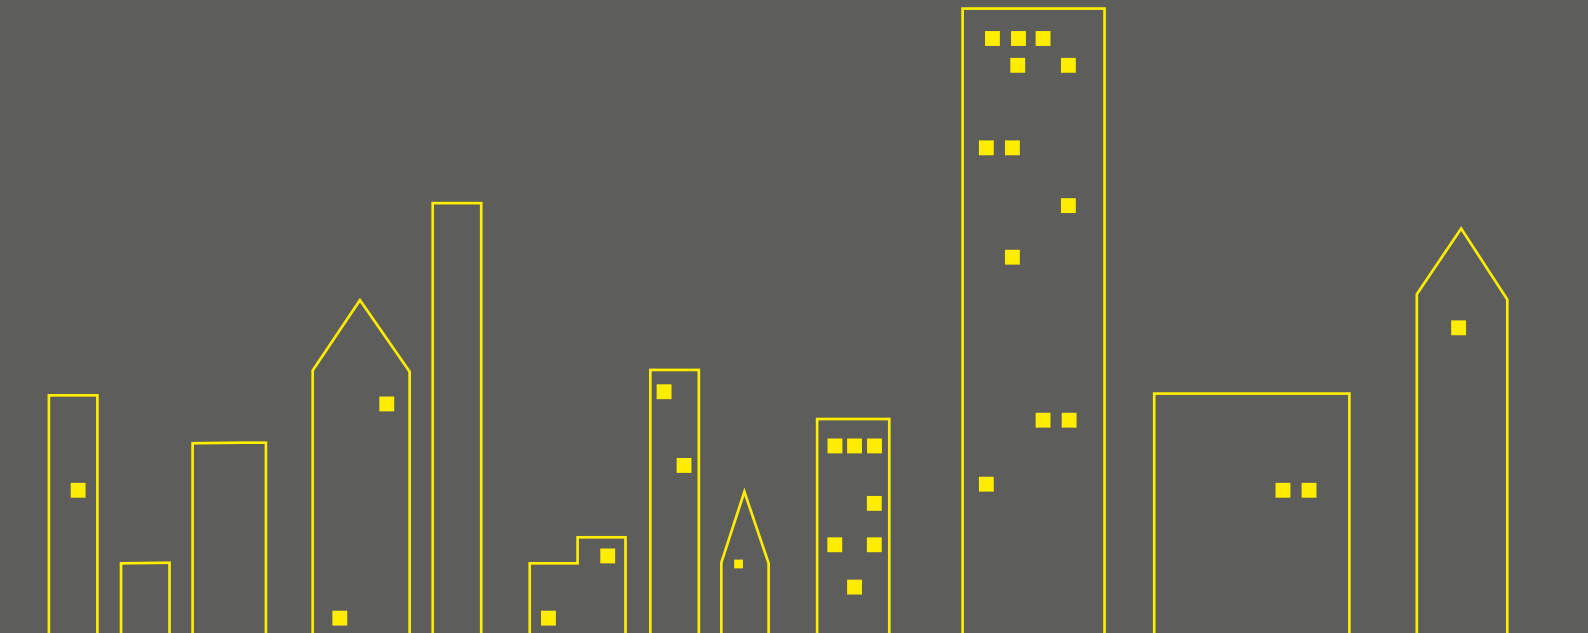


KINETIC WIRELESS SMART CONTROLS

The new wireless Kinetic Switching system allows users to turn on their kitchen, bedroom or bathroom lighting in three different ways. Lighting can be controlled manually by using the switch, through a smart phone or tablet using the Smart Life App (downloadable via the QR code on the instruction leaflet), or by connecting it to a voice controlled intelligent personal assistant such as Amazon Alexa or Google Home. Once connected, lighting can be operated with simple commands, such as "Alexa turn on kitchen lights" or "Google dim plinth lights".




12/24V Furniture Lighting Smart Wireless Receiver SY2416

This receiver can be used to switch or dim 12V or 24Vdc LED lighting.

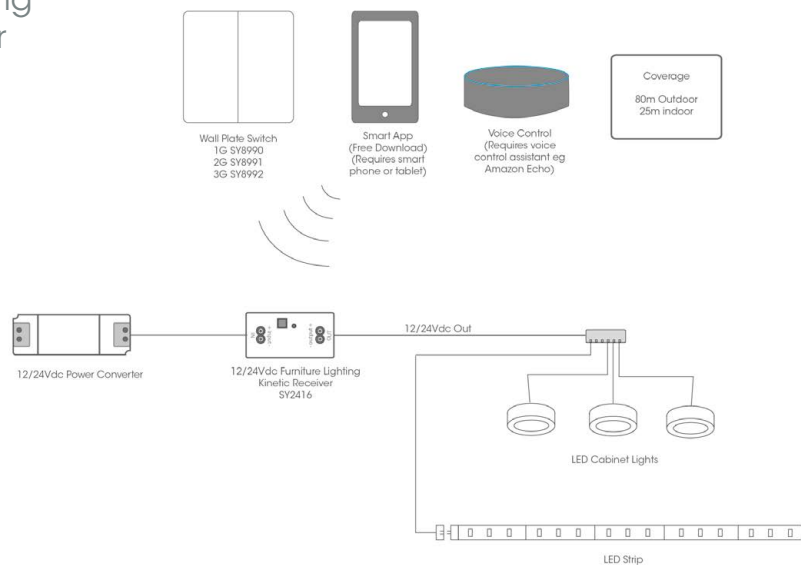

240V Lighting Smart Wireless Receiver SY8989/NEW

This receiver can be used to switch 240V LED lighting, including Pendant Lighting & bathroom fans. You can also dim connected lights (with a dimmable light source).

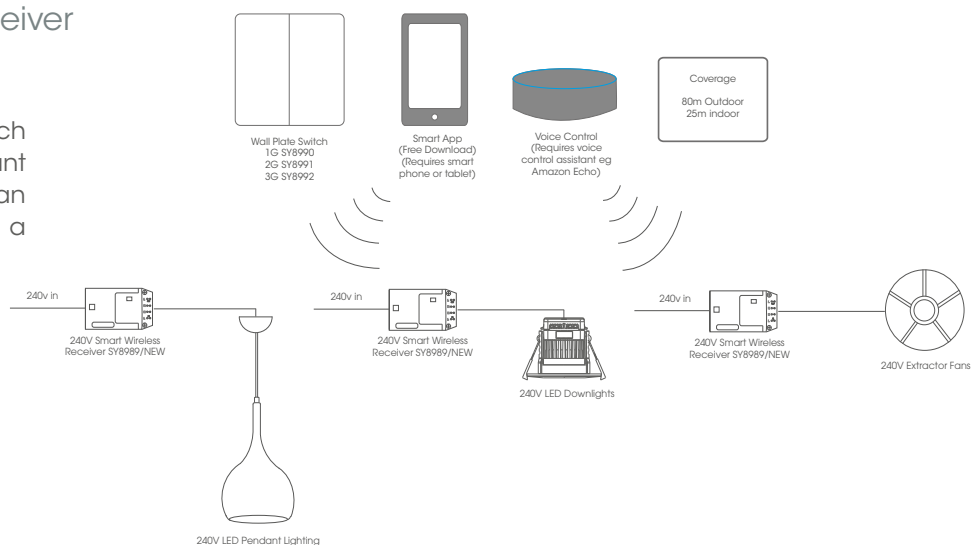

Kinetic Switches

The Kinetic Switches require no wiring or batteries and can be installed anywhere in the home, including the bathroom due to its IP67 rating.



1 Gang Kinetic Switch
SY8990



2 Gang Kinetic Switch
SY8991



3 Gang Kinetic Switch
SY8992



LED STRIP FOR KITCHENS



ARC 5M Reel
SY9026WW or NW
Warm White or Natural White



Suitable Power Converters
SY9980B - 8W 12Vdc (max 5m)
SY9739B - 15W 12Vdc (max 10m)

Technical Information

Power Supply	12Vdc
Adhesive	VHB
Cable Length	2m on both ends
Guarantee	5 Years
Colour Appearance	Warm White or Natural White
Colour Temperature	3000K - 3500k or 4000K - 4500K
Wattage	1.5W/m
IP Rating	IP67
Cut Marks	Every 25mm
LEDs per metre	360



3M or 5M LED COB Reel
Warm White or Natural White
3M - SY9022WW or NW
5M - SY9018A/WW or NW
(Reel includes 1.5m distribution cable at both ends)

1.5m reconnection cable
SY9002

Suitable Power Converters
SY9739B - 15W 12Vdc (max 3m)
SY7350C - 20W 12Vdc (max 5m)

Technical Information

Power Supply	12Vdc
Adhesive	VHB
Cable Length	1.5m at both ends
Guarantee	5 Years
Colour Appearance	Warm White or Natural White
Colour Temperature	3000K - 3500K or 4000K - 4500K
Colour Rendering Index	WW - Ra 85 NW - Ra 85
Wattage	4W/m
IP Rating	IP20
Cut Marks	Every 25mm
LEDs per metre	360



5M Reel
SY8981WW or NW
Warm White or Natural White

Suitable Power Converters
SY7350C - 20W 12Vdc (max 2m)
SY7715 - 30W 12Vdc (max 3m)
SY7351C - 50W 12Vdc (max 5m)

Technical Information

Power Supply	12Vdc
Adhesive	VHB
Cable Length	2m on both ends
Guarantee	5 Years
Colour Appearance	Warm White or Natural White
Colour Temperature	3000K - 3500k or 4000K - 4500K
Colour Rendering Index	WW - Ra 82 NW - Ra 83
Wattage	9.6W/m
IP Rating	IP20
Cut Marks	Every 25mm
LEDs per metre	120



5M Reel
SY8976WW or NW
Warm White or Natural White

Suitable Power Converters
SY9739B - 15W 12Vdc (max 3m)
SY7350C - 20W 12Vdc (max 5m)

Technical Information

Power Supply	12Vdc
Adhesive	VHB
Cable Length	2m on both ends
Guarantee	5 Years
Colour Appearance	Warm White or Natural White
Colour Temperature	3000K - 3500k or 4000K - 4500K
Colour Rendering Index	WW - 85 NW - Ra 84
Wattage	4W/m
IP Rating	IP20
Cut Marks	Every 25mm
LEDs per metre	120



1M - SY8986WW or NW
2M - SY8987WW or NW
3M - SY8988WW or NW
Warm White or Natural White

Suitable Power Converters
SY7350C - 20W 12Vdc (max 2m)
SY7715 - 30W 12Vdc (max 3m)
SY7351C - 50W 12Vdc (max 5m)

Technical Information

Power Supply	12Vdc
Adhesive	VHB
Cable Length	1.5m cable on one end
Guarantee	5 Years
Colour Appearance	Warm White or Natural White
Colour Temperature	3000K - 3500k or 4000K - 4500K
Colour Rendering Index	WW - Ra 85 NW - Ra 86
Wattage	9.6W/m
IP Rating	IP65
Cut Marks	Every 25mm
LEDs per metre	120

LED STRIP FOR KITCHENS



1M - SY8983WW or NW
 2M - SY8984WW or NW
 3M - SY8985WW or NW
 Warm White or Natural White

Suitable Power Converters
 SY9739B - 15W 12Vdc (max 3m)
 SY7350C - 20W 12Vdc (max 5m)

Technical Information

Power Supply	12Vdc
Adhesive	VHB
Cable Length	1.5m cable on one end
Guarantee	5 Years
Colour Appearance	Warm White or Natural White
Colour Temperature	3000K - 3500k or 4000K - 4500K
Colour Rendering Index	WW - Ra 85 NW - Ra 85
Wattage	4W/m
IP Rating	IP65
Cut Marks	Every 50mm
LEDs per metre	60





Bespoke cut lengths of LED strip within aluminium extrusions

Bespoke cut lengths of LED strip within aluminium extrusions offers the client a fast fit solution without the need for cutting strip and the profile to suit on site.

Numerous types of recessed or surface mounted profiles are available, along with colour temperature from 2500k up to 6500k.

All products are plug & play and we can also supply various door sensors & PIR sensors. Tunable White & RGB colour changing LED Strip also available.

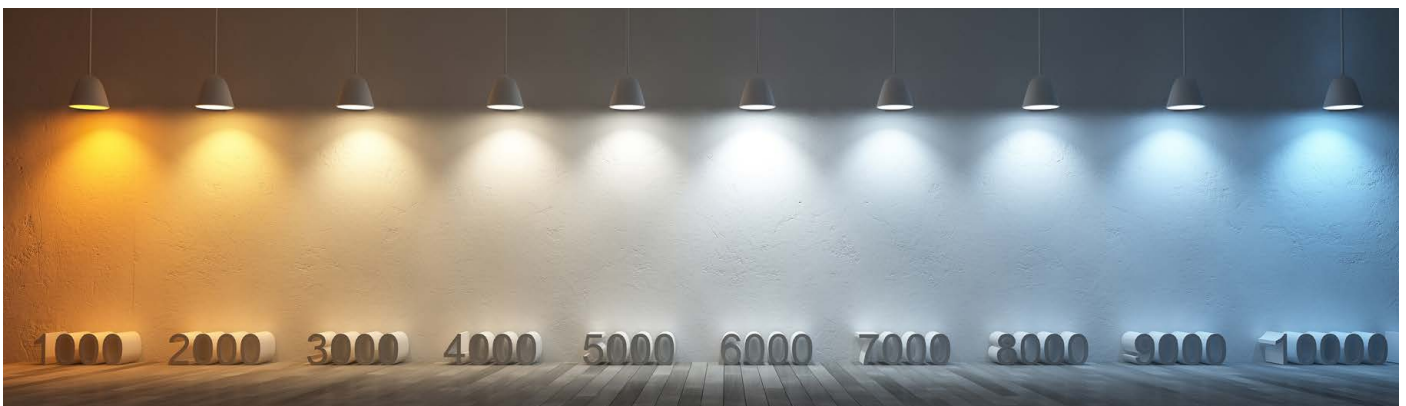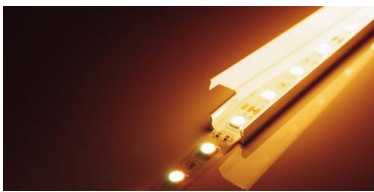


ALL PRODUCTS ARE COVERED BY A 5-YEAR WARRANTY

LIGHTING FOR KITCHENS

Sirius Connect

The Sirius Connect features an innovative new plug and play system, in which the cable detaches directly from the back of the light unit enabling the fitting to be installed easily into the base of a cabinet.

The Sirius Connect also features a diffused cover, so there are no visible LED points in the fitting, and also has a 120 degree beam angle which fills cabinets or work surfaces, eliminating dark spots.

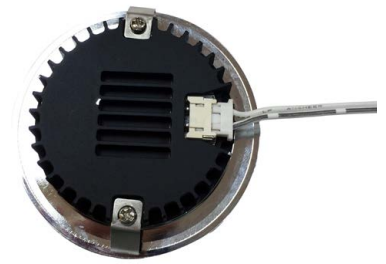

Sirius Connect LED Recessed Light
SY9566WW or NW

Suitable Power Converters
SY9980B 8W 12Vdc (max 3 lights)
SY9739B 15W 12Vdc (max 5 lights)

Technical Information

Finish	Brushed Nickel
Power Supply	12Vdc
Cable Length	2m
Guarantee	5 Years
Colour Appearance	Warm White or Natural White
Colour Temperature	2700K - 3500K or 4000K - 4500K
Luminous Efficacy	WW - 65 lm/W NW - 70 lm/W
Colour Rendering Index	WW - Ra 82 NW - Ra 85
Wattage	2.6W
IP Rating	IP44
Beam Angle	120°



Sirius Connect LED Surface/
Recessed Light
SY9567WW or NW

Suitable Power Converters
SY9980B 8W 12Vdc (max 3 lights)
SY9739B 15W 12Vdc (max 5 lights)

Technical Information

Finish	Brushed Nickel
Power Supply	12Vdc
Cable Length	2m
Guarantee	5 Years
Colour Appearance	Warm White or Natural White
Colour Temperature	2700K - 3500K or 4000K - 4500K
Luminous Efficacy	WW - 65 lm/W NW - 70 lm/W
Colour Rendering Index	WW - Ra 82 NW - Ra 85
Wattage	2.6W
IP Rating	IP44
Beam Angle	120°



Sirius Connect LED Designer Tri-Light
SY9568WW or NW

Suitable Power Converters
SY9980B 8W 12Vdc (max 3 lights)
SY9739B 15W 12Vdc (max 5 lights)

Technical Information

Finish	Brushed Nickel
Power Supply	12Vdc
Cable Length	2m
Guarantee	5 Years
Colour Appearance	Warm White or Natural White
Colour Temperature	2700K - 3500K or 4000K - 4500K
Luminous Efficacy	WW - 65 lm/W NW - 70 lm/W
Colour Rendering Index	WW - Ra 82 NW - Ra 85
Wattage	2.6W
IP Rating	IP44
Beam Angle	120°



Sirius Connect LED Tri-Light
SY9569WW or NW

Suitable Power Converters
SY9980B 8W 12Vdc (max 3 lights)
SY9739B 15W 12Vdc (max 5 lights)

Technical Information

Finish	Brushed Nickel
Power Supply	12Vdc
Cable Length	2m
Guarantee	5 Years
Colour Appearance	Warm White or Natural White
Colour Temperature	2700K - 3500K or 4000K - 4500K
Luminous Efficacy	WW - 65 lm/W NW - 70 lm/W
Colour Rendering Index	WW - Ra 82 NW - Ra 85
Wattage	2.6W
IP Rating	IP44
Beam Angle	120°

LIGHTING FOR KITCHENS



Illuma 3 Switchable Dimmable
LED IP65 Fire Rated Downlight
White
SY9004WH
Brushed Nickel Bezel
SY9005BN
Polished Chrome Bezel
SY9006CC
Matt Black Bezel
SY9005BL
Gold Bezel
SY9005G



Technical Information

Power Supply	240V
Colour Temperature	Switchable 3000k/4000k/6000k
Guarantee	5 Years
Wattage	8W
Luminous Flux	616lm (WW), 702lm (NW), 632lm (CW)
Colour Rendering Index	>80
IP Rating	IP65
Finish	White (Polished Chrome, Brushed Nickel, Matt Black & Gold available to purchase separate)
Beam Angle	60°
Cut Out Size	70mm



Motorised Pop Up Module
with Speaker &
Wireless Qi charger
SY8994/SPEAKER

Technical Information

Finish	Silver
Wireless Charging	Qi
Cut Out Size	95mm
UK Sockets	2
USB Ports	2 X USB-A
USB Port Current	2100mA (combined)
IP Rating	IP44 (when down)
Cable Length	1.9m
Guarantee	5 Years



Motorised Pop Up Module
with Wireless Qi charger
SY8994

Technical Information

Finish	Silver
Wireless Charging	Qi
Cut Out Size	95mm
UK Sockets	3
USB Ports	2 x USB-A
USB Port Current	2100mA (combined)
IP Rating	IP44 (when down)
Cable Length	1.9m
Guarantee	5 Years



EVOline Backflip Module
Stainless Steel
SY9736SS/C

EVOline Backflip Module
Black Glass
SY9736BK/C

EVOline Backflip Module
Black Steel
SY9736BL/C

EVOline Backflip Module
White Glass
SY9736WH/C

EVOline Backflip Module
White Steel
SY9736WS/C

EVOline Backflip Module
Brass Effect
SY9736BE/C

EVOline Backflip Module
Grey Ceramic
SY9736GC/C



Technical Information

Finish	Shown opposite
Power Supply	240V
UK Sockets	2
USB Ports	1 X USB-C (USB-A still available to order)
Cut Out	88 x 215mm
Guarantee	5 Years



LIGHTING FOR BEDROOMS



ARC 5M Reel
SY9026WW or NW
 Warm White or Natural White



Suitable Power Converters
SY9980B - 8W 12Vdc (max 5m)
SY9739B - 15W 12Vdc (max 10m)

Technical Information

Power Supply	12Vdc
Adhesive	VHB
Cable Length	2m on both ends
Guarantee	5 Years
Colour Appearance	Warm White or Natural White
Colour Temperature	3000K - 3500k or 4000K - 4500K
Wattage	1.5W/m
IP Rating	IP67
Cut Marks	Every 25mm
LEDs per metre	360



3M or 5M LED COB Reel
 Warm White or Natural White
3M - SY9022WW or NW
5M - SY9018A/WW or NW
 (Reel includes 1.5m distribution cable at both ends)

1.5m reconnection cable
SY9002

Suitable Power Converters
SY9739B - 15W 12Vdc (max 3m)
SY7350C - 20W 12Vdc (max 5m)

Technical Information

Power Supply	12Vdc
Adhesive	VHB
Cable Length	1.5m at both ends
Guarantee	5 Years
Colour Appearance	Warm White or Natural White
Colour Temperature	3000K - 3500k or 4000K - 4500K
Colour Rendering Index	WW - Ra 85 NW - Ra 85
Wattage	4W/m
IP Rating	IP20
Cut Marks	Every 25mm
LEDs per metre	360



5M Reel
SY8976WW or NW
 Warm White or Natural White

Suitable Power Converters
SY9739B - 15W 12Vdc (max 3m)
SY7350C - 20W 12Vdc (max 5m)

Technical Information

Power Supply	12Vdc
Adhesive	VHB
Cable Length	2m on both ends
Guarantee	5 Years
Colour Appearance	Warm White or Natural White
Colour Temperature	3000K - 3500k or 4000K - 4500K
Colour Rendering Index	WW - 85 NW - Ra 84
Wattage	4W/m
IP Rating	IP20
Cut Marks	Every 25mm
LEDs per metre	120



Passive Infra Red Sensor
SY8815

12 Way Distribution Block
SY7637



Technical Information

Finish	White
Power Supply	12/24Vdc
Cable Length	2m sensor cable
Max Current	10A
Sensor Distance	1 - 3M
Sensor Range	120°
Adjustable Timer	30 - 150 seconds
Wattage	100W (12Vdc) 200W (24Vdc)
IP Rating	IP20
Mounting	Recessed or Surface (Vertical or Horizontal)



**Multi Purpose Door Sensor/
 IR Sensor**
SY8814

12 Way Distribution Block
SY7637



Technical Information

Finish	White
Power Supply	12Vdc/24Vdc
Cable Length	2m sensor cable
Wattage	100W (12Vdc) 200W (24Vdc)
IP Rating	IP20
Mounting	Surface or Recessed

LIGHTING FOR BEDROOMS



Wireless Hidden Qi Charger
SY7962/A

Technical Information

Standard	Qi V 1.2 compliant
No of Coil	1
Wireless Charging Distance	< 4mm
Input Voltage	DC 5 - 12V
Input Current	2.0A
Rated Output	2.0A
Power Loading Max	15W Max
Wireless Charging Efficiency	>75%
Operating Temperature	0 - 40°C
Self-Power Consumption	0.5W



LIGHTING FOR BATHROOMS



1M - SY8983WW or NW
 2M - SY8984WW or NW
 3M - SY8985WW or NW
 Warm White or Natural White

Suitable Power Converters
 SY9739B - 15W 12Vdc (max 3m)
 SY7350C - 20W 12Vdc (max 5m)

Technical Information

Power Supply	12Vdc
Adhesive	VHB
Cable Length	1.5m cable on one end
Guarantee	5 Years
Colour Appearance	Warm White or Natural White
Colour Temperature	3000K - 3500k or 4000K - 4500K
Colour Rendering Index	WW - Ra 85 NW - Ra 85
Wattage	4W/m
IP Rating	IP65
Cut Marks	Every 50mm
LEDs per metre	60



1M - SY8986WW or NW
 2M - SY8987WW or NW
 3M - SY8988WW or NW
 Warm White or Natural White

Suitable Power Converters
 SY7350C - 20W 12Vdc (max 2m)
 SY7715 - 30W 12Vdc (max 3m)
 SY7351C - 50W 12Vdc (max 5m)

Technical Information

Power Supply	12Vdc
Adhesive	VHB
Cable Length	1.5m cable on one end
Guarantee	5 Years
Colour Appearance	Warm White or Natural White
Colour Temperature	3000K - 3500k or 4000K - 4500K
Colour Rendering Index	WW - Ra 85 NW - Ra 86
Wattage	9.6W/m
IP Rating	IP65
Cut Marks	Every 25mm
LEDs per metre	120



Hamilton Tunable LED Mirror
 with Bluetooth Speaker & Demister
 800mm x 600mm
 SY9015/SPEAKER

Technical Information

Power Supply	240V
Cable Length	300mm
Guarantee	5 Years
Colour Appearance	Tunable White (Warm, Natural or Cool White)
Colour Temperature	Tunable White (2700K, 4000K or 6500K)
Wattage	24W
IP Rating	IP44
Total Lumens	1400lm



Windsor Tunable LED Mirror
 with Bluetooth Speaker & Demister
 600mm x 800mm
 SY9016/SPEAKER

Technical Information

Power Supply	240V
Cable Length	300mm
Guarantee	5 Years
Colour Appearance	Tunable White (Warm, Natural or Cool White)
Colour Temperature	Tunable White (2700K, 4000K or 6500K)
Wattage	24W
IP Rating	IP44
Total Lumens	1400lm



Milton Tunable LED Mirror
 with Demister 600mm x 800mm
 SY9007

Technical Information

Power Supply	240V
Cable Length	300mm
Guarantee	5 Years
Colour Appearance	Tunable White (Warm, Natural or Cool White)
Colour Temperature	Tunable White (2700K, 4000K or 6500K)
Wattage	24W
IP Rating	IP44
Total Lumens	1400lm


LIGHTING FOR BATHROOMS



Sudbury Tunable LED Mirror
with Demister 600mm
SY9009


Technical Information

Power Supply	240V
Cable Length	300mm
Guarantee	5 Years
Colour Appearance	Tunable White (Warm, Natural or Cool White)
Colour Temperature	Tunable White (2700K, 4000K or 6500K)
Wattage	24W
IP Rating	IP44
Total Lumens	1400lm



Dual Voltage Shaver Socket
240/110V
Chrome - SY9660CC
White - SY9258

This shaver socket is suitable for use in bathrooms as required by IEE wiring regulations BS7671: 2001 Section 601

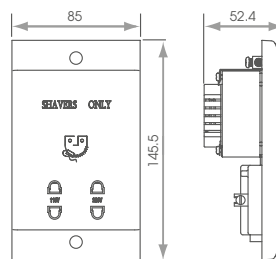


Shower Fan Kit
SY7688A/NW or CW
Natural White or Cool White





Technical Information

Power Supply	230V/1PH/50hz
Fan Type	Axial
Controls	Timer (Adjustable)
Mounting	In-line
Sound Pressure d B (A) @ 3M	39
Power Watts	16W
Amps	0.01
Specific Fan Power	0.53
Duct Diameter	100mm
Rating	IPX4
Material Finish	ABS
Weight (kg)	0.41

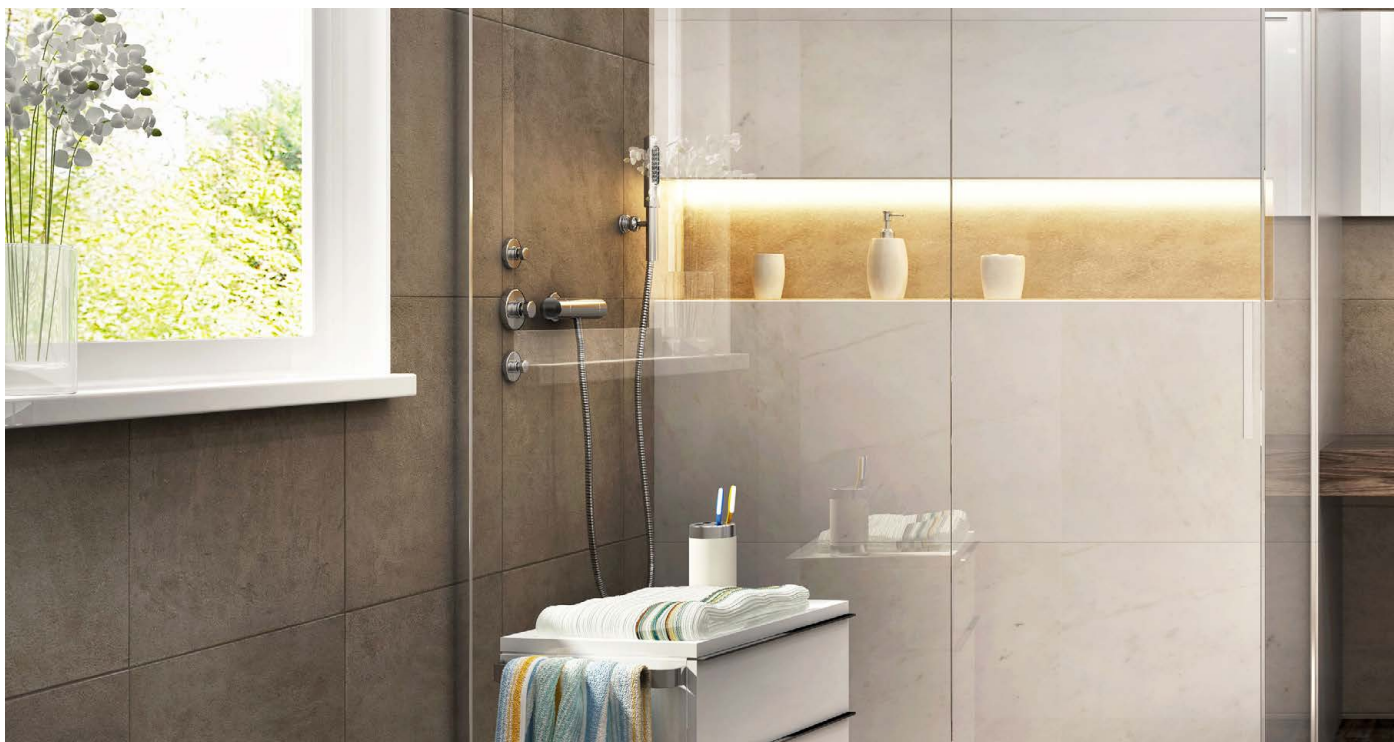

ALL PRODUCTS ARE COVERED BY A 5-YEAR WARRANTY

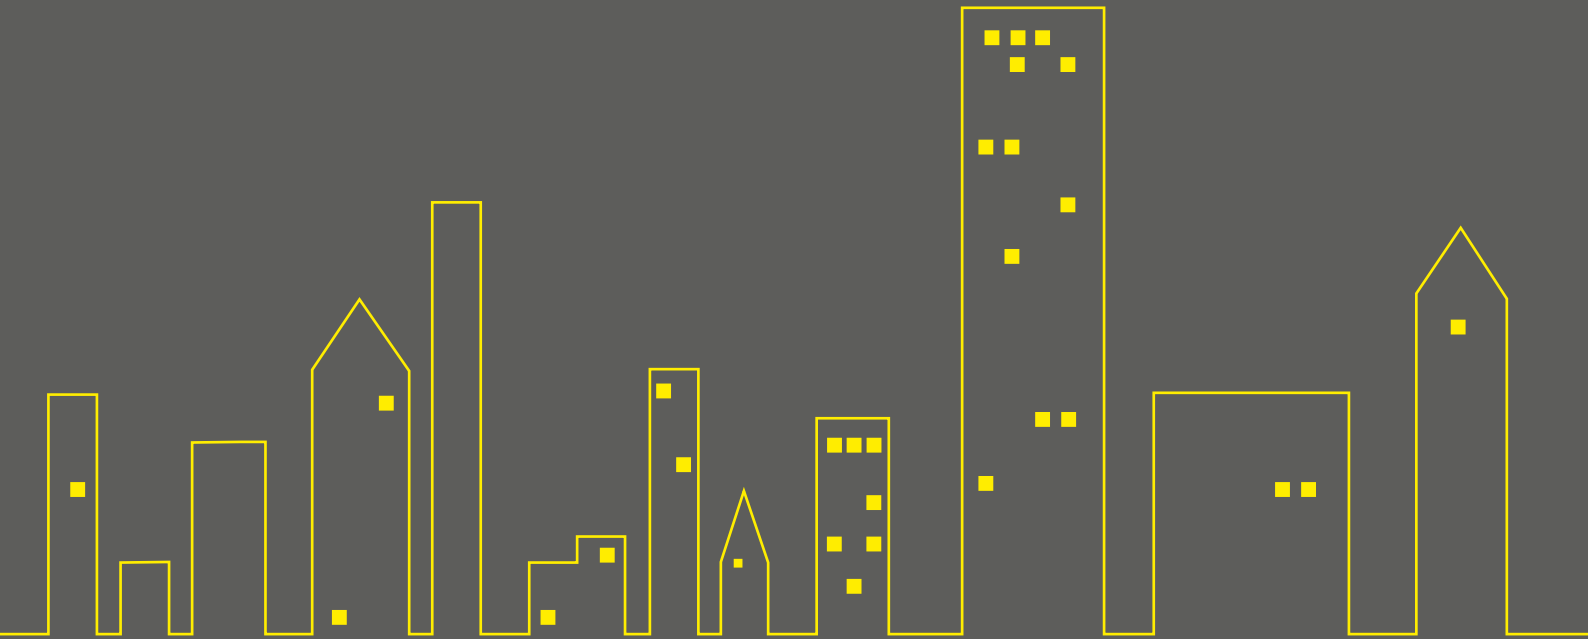

SycamoreLED.com
Unit 6 Astley Lane Industrial Estate
Swillington
Leeds
West Yorkshire
LS26 8XT



Listed in 
LUCKINS™

www.sycamoreLED.com



Tel: +44 (0)113 286 6686

sales@sycamoreLED.com

tech@sycamoreLED.com