




The Technical Spec....	
Fitting Type	LED
Voltage	12Vdc
Colour Temperature	Natural White (4000K)
Guarantee	5 Years
Wattage	3.5W
Total Lumens	156lm
CRI	Ra87
Cable Length	1.5m
Mounting	Surface
IP Rating	IP20
Finish	Aluminium/matt black

The rectangular version of the Solaris surface mounted fitting has a super slim profile, in a sleek aluminium or matt black finish. The Solaris also had a 120 degree beam angle, which fills cabinets or work surfaces and eliminates dark spots.

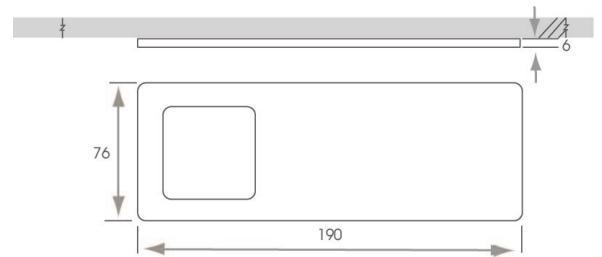

Dimensions shown in mm

Part Number	Description
SY8951	Solaris Recti Diffused LED Cabinet Light
SY8951BL	Solaris Recti Diffused LED Cabinet Light Matt Black/Natural White
Suitable Power Converters	
SY9980B	12Vdc 8W LED Power Converter (1—2 lights)
SY9739A/MF	12Vdc 15W LED Power Converter (1—4 lights)
SY7350A/MF	12Vdc 20W LED Power Converter (1—5 lights)
SY7715	12Vdc 30W LED Power Converter (1—6 lights)
Compatible Accessories	
SY7183/2 or 5	Extension lead in 2m or 5m (extend from power converter to light)
Refer to Website	Kinetic Smart Lighting Controls (inc dimming)
Refer to Website	4 Zone Remote Controls (inc dimming)
Refer to Website	Switches, Sensors and Dimmers
	We have a selection of motion sensors, door sensors, switches and dimmers available for this product.