

Installation instructions : IP44 Diffused LED Floating Shelf 600mm/900mm 7417A/7418A

Thank you for purchasing this SycamoreLED.com product. Please make sure instructions are followed carefully prior to and during installation and product is not altered, otherwise warranty may not be valid. For technical support or warranty information please visit www.sycamoreLED.com, or call our dedicated technical helpline +44 (0) 113 2866686.

IMPORTANT—Please read prior to installation


- 1) Please read these instructions carefully before commencing any work
- 2) Please retain these instructions for future reference
- 3) It is strongly recommended that this unit is installed by a qualified electrician in accordance with the IEE wiring regulations and building regulations
- 4) To prevent electrocution switch the power off at the mains supply before installing or maintaining this fitting
- 5) Ensure others cannot restore the electrical supply without your knowledge
- 6) The PSU must be rated 12VDC and be compatible with the pre-wired connector system of this product
- 7) Never exceed the wattage stated

INSTALLATION


- 1) install the mounting brackets with the spacing distances as follows—



- 2) Connect 240V supply L, N & E to connector block

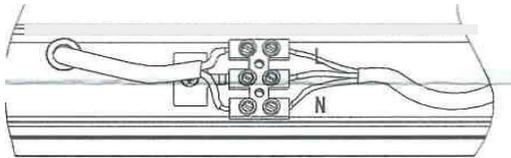

- 3) Lift shelf onto brackets and lock into position

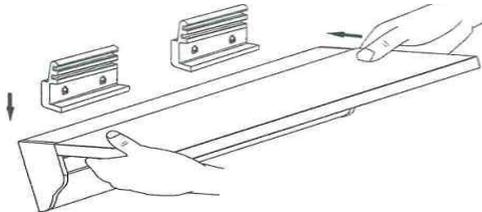

- 4) Check the shelf is level
- 5) Restore power and check operation of shelf

CARE IN USE

- 1) Switch power off at switch
- 2) Use a damp cloth to wipe the shelf and the body of the fitting

sycamore SY7417/7418



This luminaire
contains built-in
LED lamps.



} LED

The lamps cannot be
changed in the luminaire.

874/2012

